


NOTE: BREAK ALL CORNERS WITH 0.015" (0.38 MM) RADIUS UNLESS OTHERWISE NOTED. STANDARD TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PART No.	CUSTOMER <b>WOLVERINE STD</b>	WLV DIE No. <b>WS10008</b>	REV No. <b>0</b>
DESCRIPTION 1.500" x 1.500" x 0.125" THK. ANGLE		PROPOSAL No.	

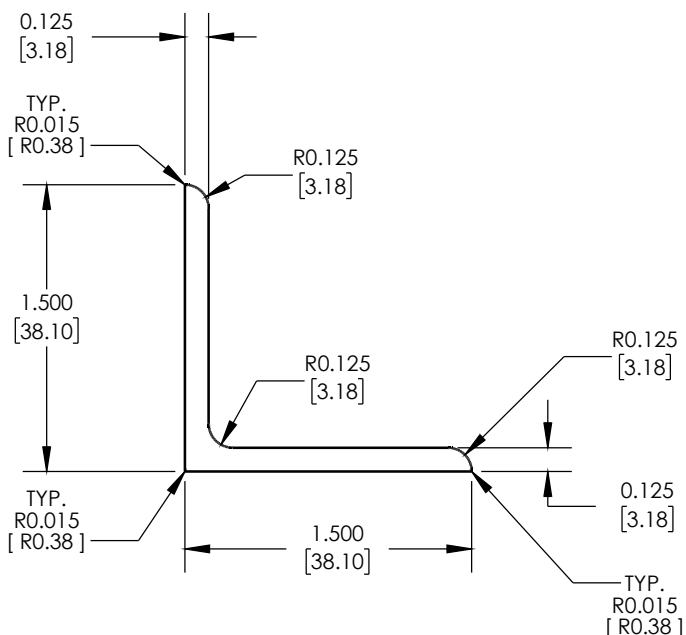

WALL THICKNESS AS SHOWN EXCEPT AS SHOWN

DATE	REV	DESCRIPTION		BY
EST. AREA	0.356	IN. <sup>2</sup>	EST. AREA 229.583	MM. <sup>2</sup>
EST. WT.	0.417	LBS/FT.	EST. WT. 0.621	KG/M
EST. PER.	5.818	IN.	EST. PER. 147.667	MM.
OUT PER.		IN.	OUT PER.	MM.
C.C.D.	2.107	IN.	C.C.D. 53.529	MM.
FACTOR 14	FINISH M/F	ALLOY & TEMP. 6063		
CKD BY	SCALE 1:1	DWN BY <b>M.B.</b>	DATE 09/05/17	

## WOLVERINE

2100 MARKET STREET  
DECATUR, AL 35816

THIS DRAWING IS NOT NECESSARILY A COPY OF YOUR ORIGINAL. PLEASE APPROVE DIMENSIONS AND TOLERANCES INDICATED. WOLVERINE ASSUMES NO RESPONSIBILITY EITHER TECHNICAL OR LEGAL FOR HAVING THIS SHAPE MADE. THE CUSTOMER AGREES TO FULLY PROTECT WOLVERINE FROM CLAIMS OF OTHERS RESULTING FROM THIS SHAPE.