


NOTE: BREAK ALL CORENERS WITH 0.015" (0.38 MM) RADIUS UNLESS OTHERWISE NOTED. STANDARD TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PART No.	CUSTOMER WOLVERINE STD	WLV DIE No. WS10020	REV No. 0
DESCRIPTION 2" x 2" x 0.125" ANGLE		PROPOSAL No.	

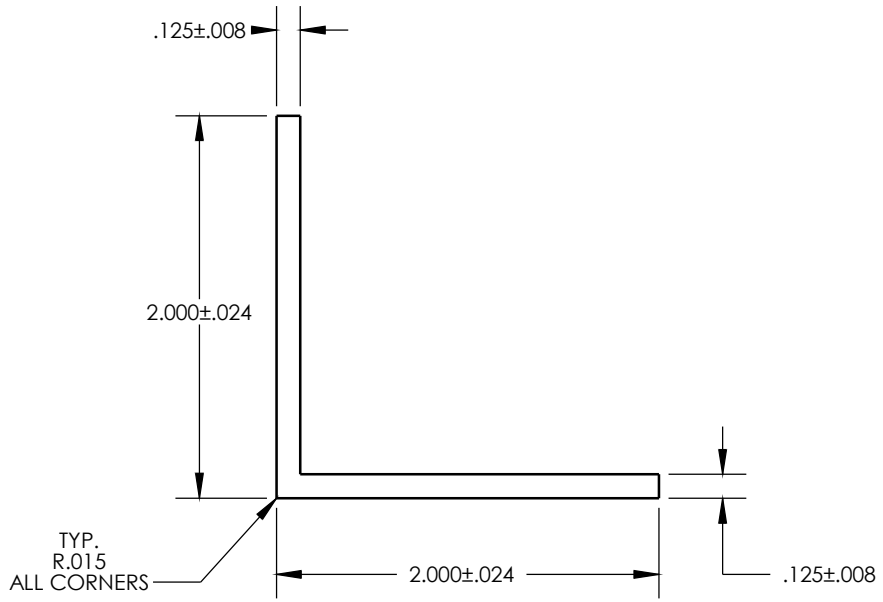

WALL THICKNESS .125 ±.008 EXCEPT AS SHOWN

DATE	REV	DESCRIPTION		BY	
EST. AREA	0.484	IN. ²	EST. AREA	312.502	MM. ²
EST. WT.	0.572	LBS/FT.	EST. WT.	0.851	KG/M
EST. PER.	8.000	IN.	EST. PER.	203.200	MM.
OUT PER.		IN.	OUT PER.		MM.
C.C.D.	2.828	IN.	C.C.D.	71.842	MM.
FACTOR 14	FINISH M/F	ALLOY & TEMP. 6063-T5			
CKD BY	SCALE 1:1	DWN BY M.B.	DATE 09/06/17		

WOLVERINE

2100 MARKET STREET
DECATUR, AL 35816

THIS DRAWING IS NOT NECESSARILY A COPY OF YOUR ORIGINAL. PLEASE APPROVE DIMENSIONS AND TOLERANCES INDICATED. WOLVERINE ASSUMES NO RESPONSIBILITY EITHER TECHNICAL OR LEGAL FOR HAVING THIS SHAPE MADE. THE CUSTOMER AGREES TO FULLY PROTECT WOLVERINE FROM CLAIMS OF OTHERS RESULTING FROM THIS SHAPE.