


NOTE: BREAK ALL CORNERS WITH 0.015" (0.38 MM) RADIUS UNLESS OTHERWISE NOTED. STANDARD TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PART No.	CUSTOMER WOLVERINE STD	WLV DIE No. WS10266	REV No. 0
DESCRIPTION 9/16" HEX		QUOTE No. 18-1427-1	PROPOSAL No. S-10830

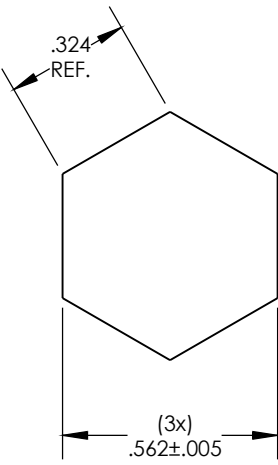

WALL THICKNESS AS SHOWN

DATE	REV	DESCRIPTION		BY	
EST. AREA	.274	IN. ²	EST. AREA	176.774	MM. ²
EST. WT.	.320	LBS/FT.	EST. WT.	.476	KG/M
EST. PER.	1.947	IN.	EST. PER.	49.454	MM.
OUT PER.		IN.	OUT PER.		MM.
C.C.D.	.649	IN.	C.C.D.	16.485	MM.
FACTOR 6	FINISH	M/F	ALLOY & TEMP.	6061	
CKD BY	SCALE	2:1	DWN BY	B.A.	DATE 11/6/18

WOLVERINE

2100 MARKET STREET
DECATUR, AL 35816
800-633-3972

THIS DRAWING IS NOT NECESSARILY A COPY OF YOUR ORIGINAL. PLEASE APPROVE DIMENSIONS AND TOLERANCES INDICATED. WOLVERINE ASSUMES NO RESPONSIBILITY EITHER TECHNICAL OR LEGAL FOR HAVING THIS SHAPE MADE. THE CUSTOMER AGREES TO FULLY PROTECT WOLVERINE FROM CLAIMS OF OTHERS RESULTING FROM THIS SHAPE.

SIGNED: _____ DATE: _____
PRINT NAME: _____