


NOTE: BREAK ALL CORENERS WITH 0.015" (0.38 MM) RADIUS UNLESS OTHERWISE NOTED. STANDARD TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PART No.	CUSTOMER WOLVERINE STD	WLV DIE No. WS10410	REV No. 0
DESCRIPTION 3 x 2.330 x .170 I-BEAM		QUOTE No. 19-1235-3	PROPOSAL No. S-11610

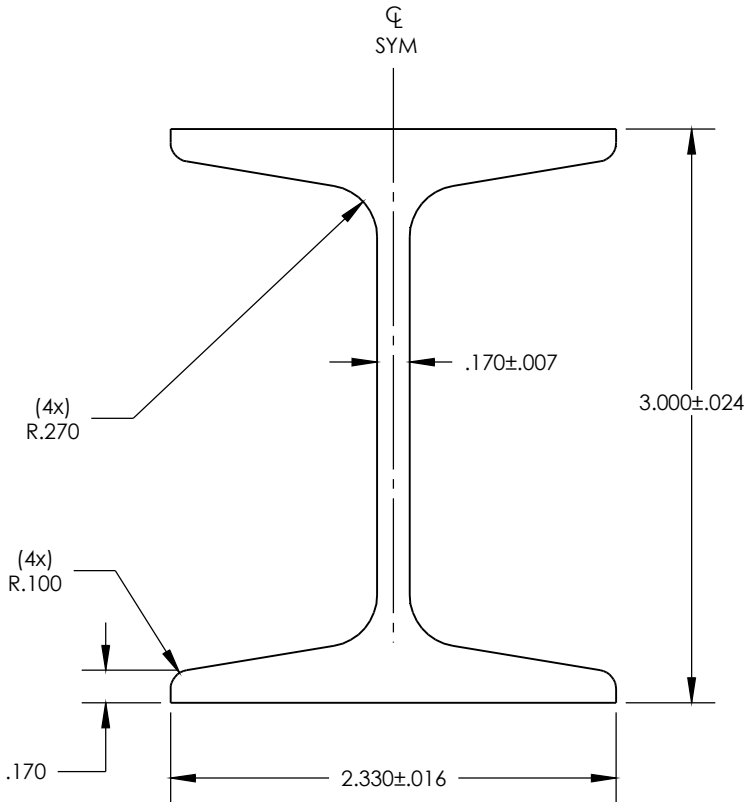

WALL THICKNESS .170 ± .007

DATE	REV	DESCRIPTION	BY
EST. AREA	1.609	IN. ²	EST. AREA 1038.062
EST. WT.	1.884	LBS/FT.	EST. WT. 2.804
EST. PER.	13.893	IN.	EST. PER. 352.882
OUT PER.		IN.	OUT PER.
C.C.D.	3.799	IN.	C.C.D. 96.495
FACTOR 7.5	FINISH M/F	ALLOY & TEMP. 6061	
CKD BY	SCALE 1:1	DWN BY B.A.	DATE 4/11/19

WOLVERINE

2100 MARKET STREET
DECATUR, AL 35816
800-633-3972

THIS DRAWING IS NOT NECESSARILY A COPY OF YOUR ORIGINAL. PLEASE APPROVE DIMENSIONS AND TOLERANCES INDICATED. WOLVERINE ASSUMES NO RESPONSIBILITY EITHER TECHNICAL OR LEGAL FOR HAVING THIS SHAPE MADE. THE CUSTOMER AGREES TO FULLY PROTECT WOLVERINE FROM CLAIMS OF OTHERS RESULTING FROM THIS SHAPE.

SIGNED: _____ DATE: _____
PRINT NAME: _____