


NOTE: BREAK ALL CORNERS WITH 0.015" (0.38 MM) RADIUS UNLESS OTHERWISE NOTED. STANDARD TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PART No.	CUSTOMER WOLVERINE STD	WLV DIE No. WS10563	REV No. 0
DESCRIPTION .375 x 5 SE BAR		QUOTE No. 19-1526-3	PROPOSAL No. S-12321

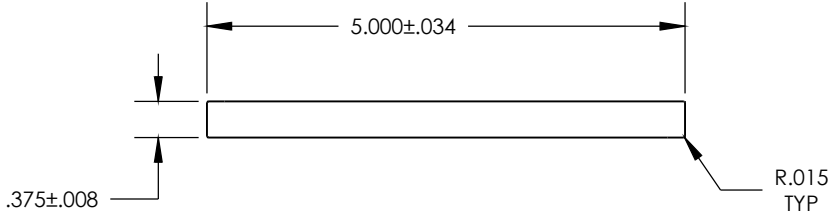

WALL THICKNESS .375 ± .008

DATE	REV	DESCRIPTION		BY
EST. AREA	1.875	IN. ²	EST. AREA	1209.675
EST. WT.	2.195	LBS/FT.	EST. WT.	3.267
EST. PER.	10.724	IN.	EST. PER.	272.390
OUT PER.		IN.	OUT PER.	
C.C.D.	5.012	IN.	C.C.D.	127.305
FACTOR 5	FINISH M/F	ALLOY & TEMP.		
CKD BY	SCALE 1:2	DWN BY B.A.	DATE	8/30/19

WOLVERINE

2100 MARKET STREET
DECATUR, AL 35816
800-633-3972

THIS DRAWING IS NOT NECESSARILY A COPY OF YOUR ORIGINAL. PLEASE APPROVE DIMENSIONS AND TOLERANCES INDICATED. WOLVERINE ASSUMES NO RESPONSIBILITY EITHER TECHNICAL OR LEGAL FOR HAVING THIS SHAPE MADE. THE CUSTOMER AGREES TO FULLY PROTECT WOLVERINE FROM CLAIMS OF OTHERS RESULTING FROM THIS SHAPE.

SIGNED: _____ DATE: _____
PRINT NAME: _____