


NOTE: BREAK ALL CORNERS WITH 0.015" (0.38 MM) RADIUS UNLESS OTHERWISE NOTED. STANDARD TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PART No.	CUSTOMER WOLVERINE STD	WLV DIE No. WS10565	REV No. 0
DESCRIPTION .250 x 5 FRE BAR		QUOTE No. 19-1526-6	PROPOSAL No. S-12324

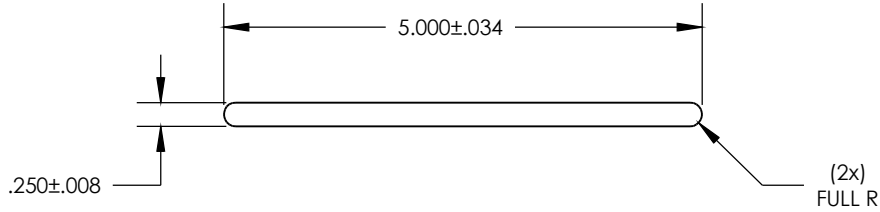

WALL THICKNESS .250 ± .008

DATE	REV	DESCRIPTION		BY	
EST. AREA	1.237	IN. ²	EST. AREA	798.063	MM. ²
EST. WT.	1.447	LBS/FT.	EST. WT.	2.153	KG/M
EST. PER.	10.285	IN.	EST. PER.	261.239	MM.
OUT PER.		IN.	OUT PER.		MM.
C.C.D.	5.000	IN.	C.C.D.	127.000	MM.
FACTOR 7.5	FINISH	M/F	ALLOY & TEMP.		
CKD BY	SCALE	1:2	DWN BY	B.A.	DATE 8/30/19

WOLVERINE

2100 MARKET STREET
DECATUR, AL 35816
800-633-3972

THIS DRAWING IS NOT NECESSARILY A COPY OF YOUR ORIGINAL. PLEASE APPROVE DIMENSIONS AND TOLERANCES INDICATED. WOLVERINE ASSUMES NO RESPONSIBILITY EITHER TECHNICAL OR LEGAL FOR HAVING THIS SHAPE MADE. THE CUSTOMER AGREES TO FULLY PROTECT WOLVERINE FROM CLAIMS OF OTHERS RESULTING FROM THIS SHAPE.

SIGNED: _____ DATE: _____

PRINT NAME: _____