


NOTE: BREAK ALL CORNERS WITH 0.015" (0.38 MM) RADIUS UNLESS OTHERWISE NOTED. STANDARD TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PART No.	CUSTOMER <b>WOLVERINE STD</b>	WLV DIE No. <b>WS11956</b>	REV No. <b>0</b>
DESCRIPTION <b>2 x 1.25 x .260/.170 AA CHANNEL</b>		QUOTE No. <b>25-1037-1</b>	PROPOSAL No. <b>S-20662</b>

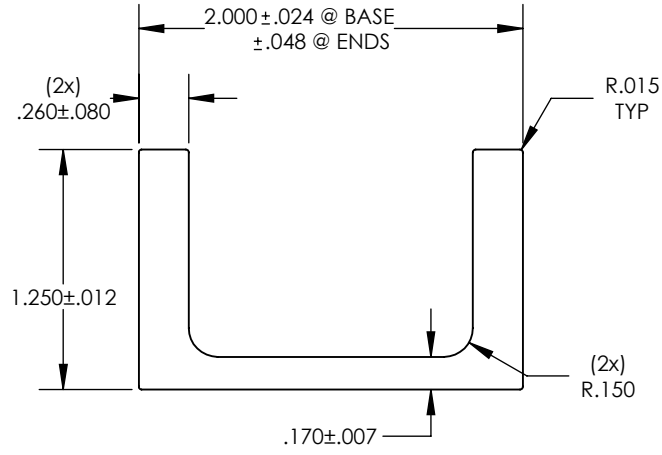

WALL THICKNESS AS SHOWN

DATE	REV	DESCRIPTION	BY
EST. AREA	.911	IN. <sup>2</sup>	EST. AREA 587.741
EST. WT.	1.066	LBS/FT.	EST. WT. 1.586
EST. PER.	8.493	IN.	EST. PER. 215.722
OUT PER.		IN.	OUT PER.
C.C.D.	2.347	IN.	C.C.D. 59.614
FACTOR 8	FINISH M/F		ALLOY & TEMP. 6061-T6
CKD BY	SCALE 1:1	DWN BY <b>B.A.</b>	DATE 1/14/25

**WOLVERINE**

2100 MARKET STREET  
DECATUR, AL 35816  
800-633-3972

THIS DRAWING IS NOT NECESSARILY A COPY OF YOUR ORIGINAL. PLEASE APPROVE DIMENSIONS AND TOLERANCES INDICATED. WOLVERINE ASSUMES NO RESPONSIBILITY EITHER TECHNICAL OR LEGAL FOR HAVING THIS SHAPE MADE. THE CUSTOMER AGREES TO FULLY PROTECT WOLVERINE FROM CLAIMS OF OTHERS RESULTING FROM THIS SHAPE.

SIGNED: \_\_\_\_\_ DATE: \_\_\_\_\_  
PRINT NAME: \_\_\_\_\_