


NOTE: BREAK ALL CORNERS WITH 0.015" (0.38 MM) RADIUS UNLESS OTHERWISE NOTED. STANDARD TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED.

CUSTOMER PART No.	CUSTOMER WOLVERINE STANDARD	WLV DIE No. WH12190	REV No. 0
DESCRIPTION	3 x 4 x .250 RECT. TUBE	QUOTE No. 25-1625-2	PROPOSAL No. H-21903

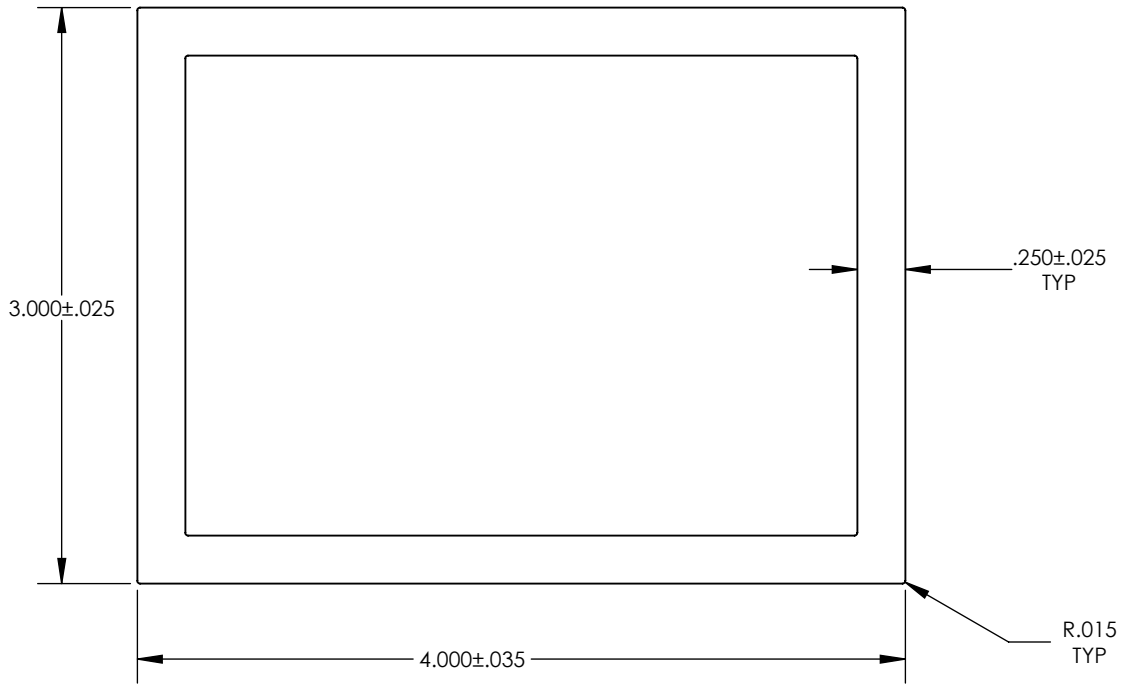

WALL THICKNESS .125 ± .025

DATE	REV	DESCRIPTION	BY
EST. AREA	3.250	IN. ²	EST. AREA 2096.770
EST. WT.	3.804	LBS/FT.	EST. WT. 5.661
EST. PER.	25.948	IN.	EST. PER. 659.079
OUT PER.	13.974	IN.	OUT PER. 354.940
C.C.D.	4.988	IN.	C.C.D. 126.695
FACTOR 7	FINISH M/F	ALLOY & TEMP.	6061
CKD BY	SCALE 1:1	DWN BY	B.A. DATE 8/29/25

WOLVERINE
 2100 MARKET STREET
 DECATUR, AL 35816
 800-633-3972

THIS DRAWING IS NOT NECESSARILY A COPY OF YOUR ORIGINAL. PLEASE APPROVE DIMENSIONS AND TOLERANCES INDICATED. WOLVERINE ASSUMES NO RESPONSIBILITY EITHER TECHNICAL OR LEGAL FOR HAVING THIS SHAPE MADE. THE CUSTOMER AGREES TO FULLY PROTECT WOLVERINE FROM CLAIMS OF OTHERS RESULTING FROM THIS SHAPE.

SIGNED: _____ **DATE:** _____
PRINT NAME: _____